

■ Features

- Power Rating: 100W
- Input Voltage: 120-277Vac
- Constant current design
- Programmable output current (1170mA-3500mA)
- Near Field Communication Programmability
- Bluetooth module input capability
- Auxiliary power: 12Vdc, 200mA max
- Dimmable with 0-10V dimmer and down to 3% at maximum output current
- UL Class 2 Output
- OVP, SCP, OTP & Open Circuit Protection
- IP20
- 5-year warranty



(Programming module)

*Product images are for illustrative purposes only and may vary from actual design.


■ Application

- Indoor lights

■ Model List*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
LXWCP100S350SS-20	120~277Vac ± 10%	100W	14-28.5V	1170mA	3500mA	85% @120V 87% @240V 87% @277V	UL/cUL

■ Wiring Diagram

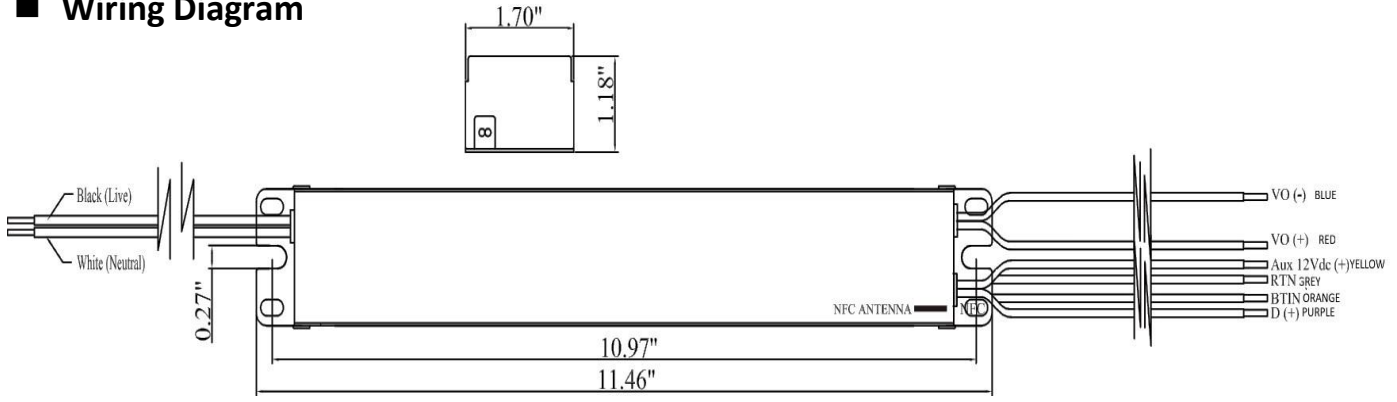

Wire Specifications	
Input	12", UL 1316 #18AWG (Black and White)
Output	12", UL 1316/1430 #18AWG VO(+)(RED) and VO(-)(BLUE)
Dimming	12", UL 1316/1430 #22AWG DIM(+)(PURPLE), RTN(-)(GREY), and Aux 12 Vdc (YELLOW)
Bluetooth	Bluetooth module input BTIN (ORANGE)

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
 31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com

■ Technical Data

Input voltage range	120~277Vac ± 10%
Frequency	50/60Hz
Power factor	> 0.9 under 120~277Vac input with 80~100% load condition (for all output currents)
Inrush current	TBD
Max input current	TBD
THD	< 20% under 120~277Vac input with 80~100% load condition (for all output currents)
Load Regulation	± 2%
Line Regulation	± 1%
Current Tolerance	± 5% at full load condition
Turn-on Delay Time	< 0.75s at full load condition
Overshoot	< 10% at full load condition
No Load Power Consumption	TBD
Ripple & Noise (pk-pk)	< 3%
Withstand voltage	Input to output, 2,800Vdc, 2mA
Leakage current	Maximum 0.5mA at 277Vac, 60Hz input
Protection	<p>Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed.</p> <p>Over current protection: Hiccup mode. Protection will trigger when load current exceeds specified output current and will auto recover after the fault mode is removed.</p> <p>Short circuit protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.</p> <p>Over temperature protection: Protection will trigger when driver overheat and auto-recovery when cooled down.</p>
Operating temperature	-20 to 50°C
Storage temperature	-40 to 85°C
Humidity	5% to 95%
MTBF	TBD
Life rating	TBD
Maximum case Temperature	90°C

■ **Technical Data(Cont.)**

Length (L)	11.46" (291mm)
Width (W)	1.70" (43mm)
Height (H)	1.15" (30mm)
Mounting (M)	13.78" (279mm)
Packing	0.8kg/unit; 25pcs/carton; (TBA)pcs/pallet

■ **Safety Compliance**

UL/cUL	UL 8750 pending
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (Consumer Limit)
EN61000-3-2	Harmonic Current Emissions Class C

■ **Near Field Communication Programmability**






Programming Module
REF. Part# LXWLB-PROG

NOTES:

1. The Near Field Communication programming module is used to program the output current settings.
2. The programming function is a non-contact process, which is safer and more efficient compared to traditional programming methods.
3. During programming the LED Driver does not require any external power source.
4. REF. Ordering part number LXWLB-PROG (includes programming module, USB cable, and pre-loaded software).
5. Contact Autec Sales for User Guide for complete programming instructions.




■ Power Factor vs Load

LXWCP100S350SS-20

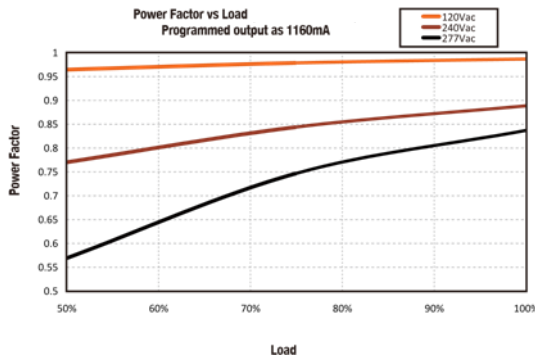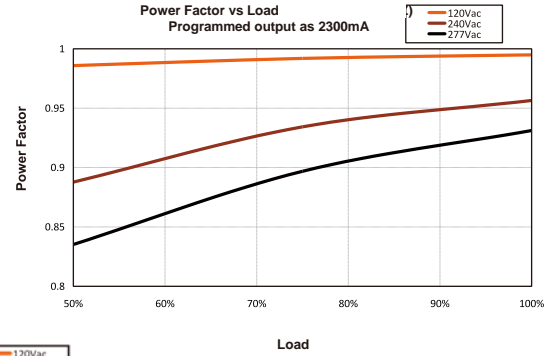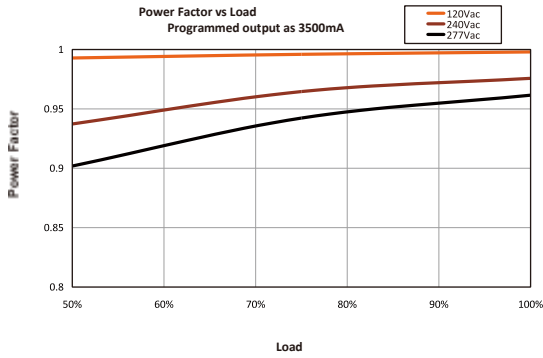


■ Efficiency vs Load


LXWCP100S350SS-20

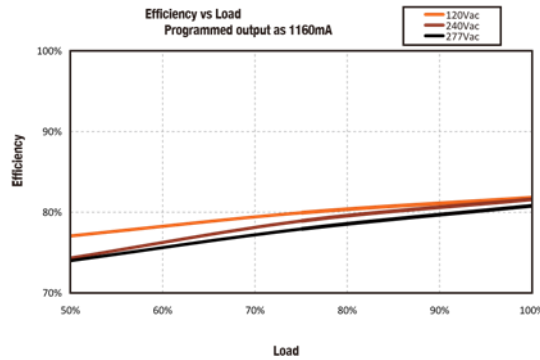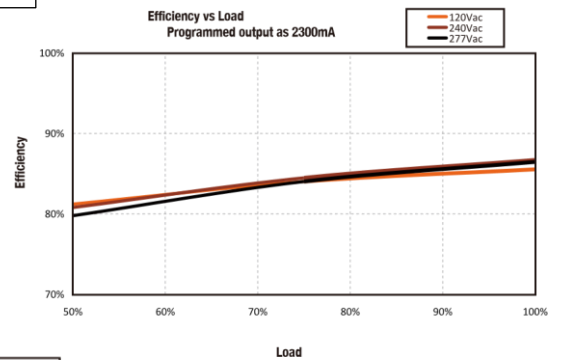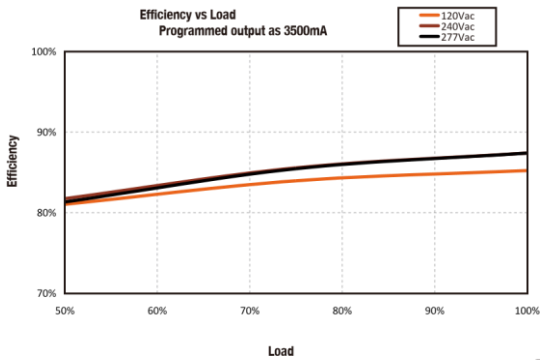


■ **Lifetime vs Case Temperature** Lifetime vs Case Temperature

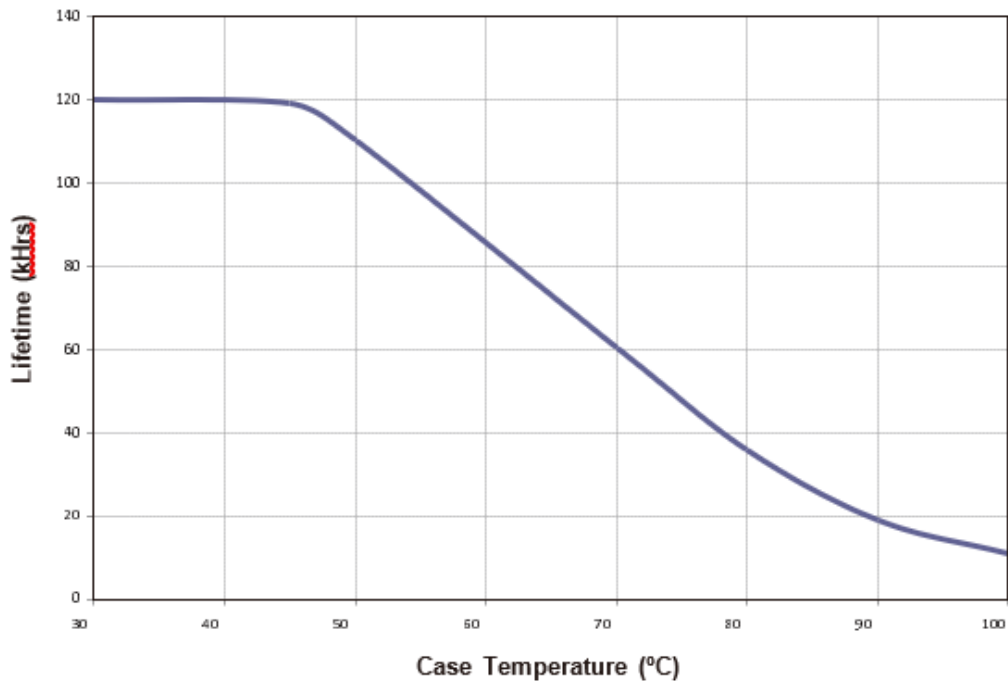

■ **Power Derating Curve vs Case Temperature**

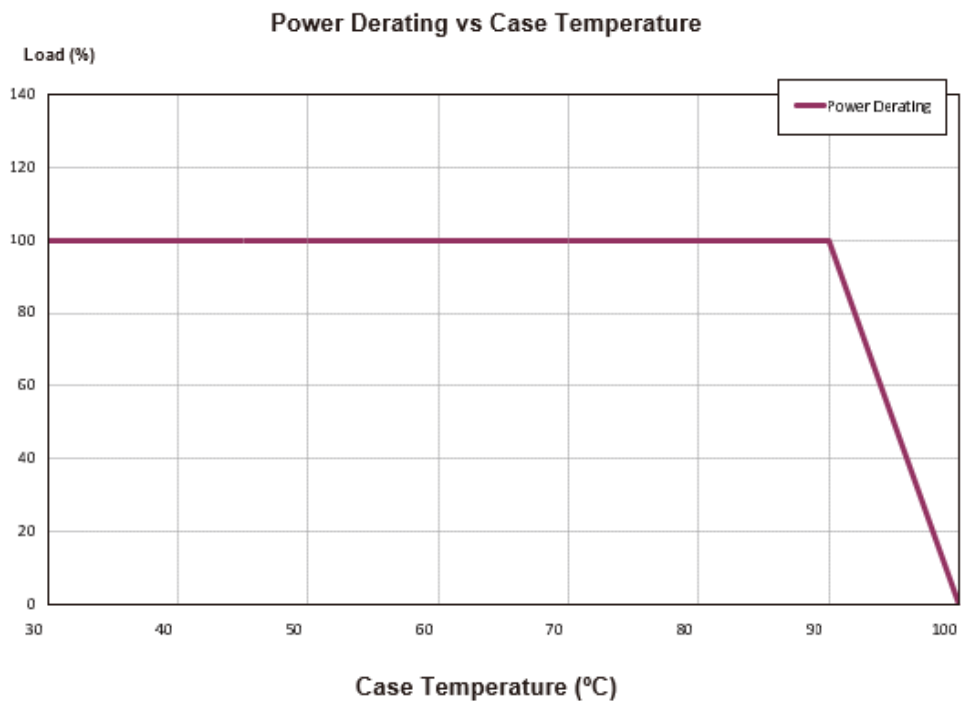

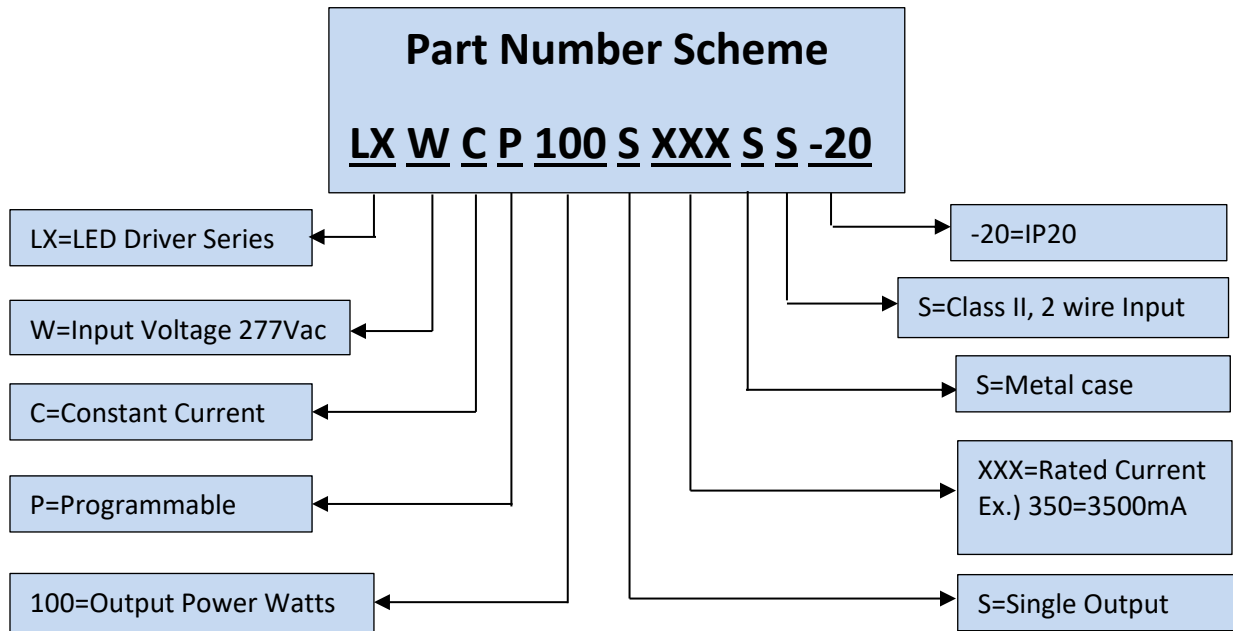

***Product images are for illustrative purposes only and may vary from actual design.**

***Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**