

WM012S Selectable Output Series

WM012S-030120-A-Z



FEATURE:



Input: 100-240VAC 50/60Hz 0.3Amax
 output: 3-12VDC adjustable.
 output current: 1A max
 Output tips: 6 DC tips
 Operating Temp: 0-40°C, 5-90% RH
 Ripple: 120mV
 Protection: Over Voltage, Over Current, Short Circuit, Over Load
 Efficiency level: VI
 Efficiency: 88%
 AC plug: US/EU/AU/UK plug available
 Average failure rate: 50,000 hours
 Safety standard: IEC60601, IEC60950, IEC61558, IEC60335, IEC61000
 Certificates: UL, CE, FCC, GS, TUV, RCM, CCC, KC
 Dimension L 65*45*33mm (exlude plug)

Wall Mount Power Supply with Rotary Selectable Output

Model	Selectable Output Voltage	Output Current	Power
WM012S-030120-A-Z	3V, 4.5V, 5V, 6V, 7.5V, 9V, 12V	1A max	12W max
DC Connectors Included	0.7x2.5x9.5mm, 1.1x3.0x9.5mm, 1.35x3.5x9.5mm, 1.7x4.0x9.55mm, 1.7x4.0x9.5mm, 2.1x5.0x9.5mm, 2.1x5.5x9.5mm		



Sales / Technical Support: +1-818-338-7788 Option 3
Email: sales@autecpower.com

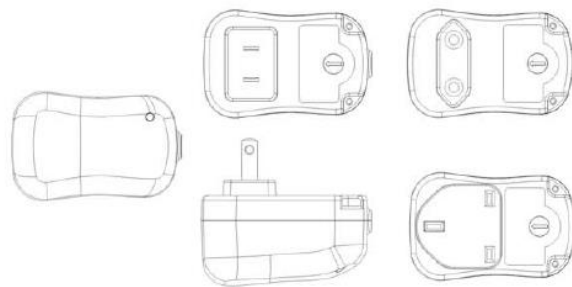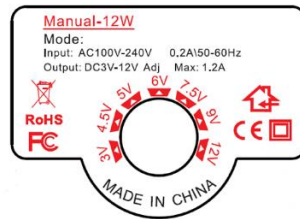

6 different DC Plugs, includes a Chuck Key for Rotary selection



Available with U.S., or EU or UK or AU type A/C inputs