

■ Features

- Power Rating: 150W
- Input Voltage: 20~30Vdc
- Constant current design
- Output current(2100mA-3150mA)
- Efficiency up to 93%
- Dimmable with 0-10V dimming (optional)
- UL Class 2
- OVP and SCP
- IP67



\*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Indoor or outdoor lights

■ Model List \*(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
LSDC-150S210SS	20~30Vdc	150W	35~72V	2100mA	2100mA	92%	UL/cUL
LSDCD150S210SS	20~30Vdc	150W	35~72V	2100mA	2100mA	92%	UL/cUL
LSDC-150S245SS	20~30Vdc	150W	35~61V	2450mA	2450mA	92%	UL/cUL
LSDCD150S245SS	20~30Vdc	150W	35~61V	2450mA	2450mA	92%	UL/cUL
LSDC-150S280SS	20~30Vdc	150W	35~54V	2800mA	2800mA	93%	UL/cUL
LSDCD150S280SS	20~30Vdc	150W	35~54V	2800mA	2800mA	93%	UL/cUL
LSDC-150S315SS	20~30Vdc	150W	35~48V	3150mA	3150mA	93%	UL/cUL
LSDCD150S315SS	20~30Vdc	150W	35~48V	3150mA	3150mA	93%	UL/cUL
LSDC-150S360SS	20~30Vdc	150W	35~42V	3600mA	3600mA	92%	UL/cUL
LSDCD150S360SS	20~30Vdc	150W	35~42V	3600mA	3600mA	92%	UL/cUL

\*(-=No dimming/D=Dimming)


**■ Technical Data**

Input voltage range	20~30Vdc
Inrush current	12A Cold start, Vin=24V, Po=150W
Max input current	6.8A @full load, Vin=24V, Po=150W
Load Regulation	5%
Line Regulation	3%
Turn-on Delay Time	0.4~0.6s
Ripple & Noise (pk-pk)	0.38V, 0.38V, 0.36V, 0.33V, 0.32V
Protection	Over voltage protection: 1.3 Vo ± 5% floating deviation. Latch mode, recycle AC after resolving problem. Short circuit protection: Latch mode, recycle AC after resolving
Operating temperature	-35 ~ 50°C
Storage temperature	-40 ~ 85°C
Humidity	Operational: 10~100% RH non-condensing Storage: 5~100% RH
MTBF	100,000 hours
Life rating	60,000 hours
Length (L)	5.91" (150mm)
Width (W)	2.58" (65.5mm)
Height (H)	1.56" (39.5mm)


**Notes:**


1. All specifications are typical at 25°C unless otherwise stated.
2. The "Efficiency" values are measured at full load, after the unit is thermally stabilized, otherwise they will be lower about 1%.
3. The "Ripple & Noise" values are measured at 20MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor.

■ **Dimming Mechanical Diagram**

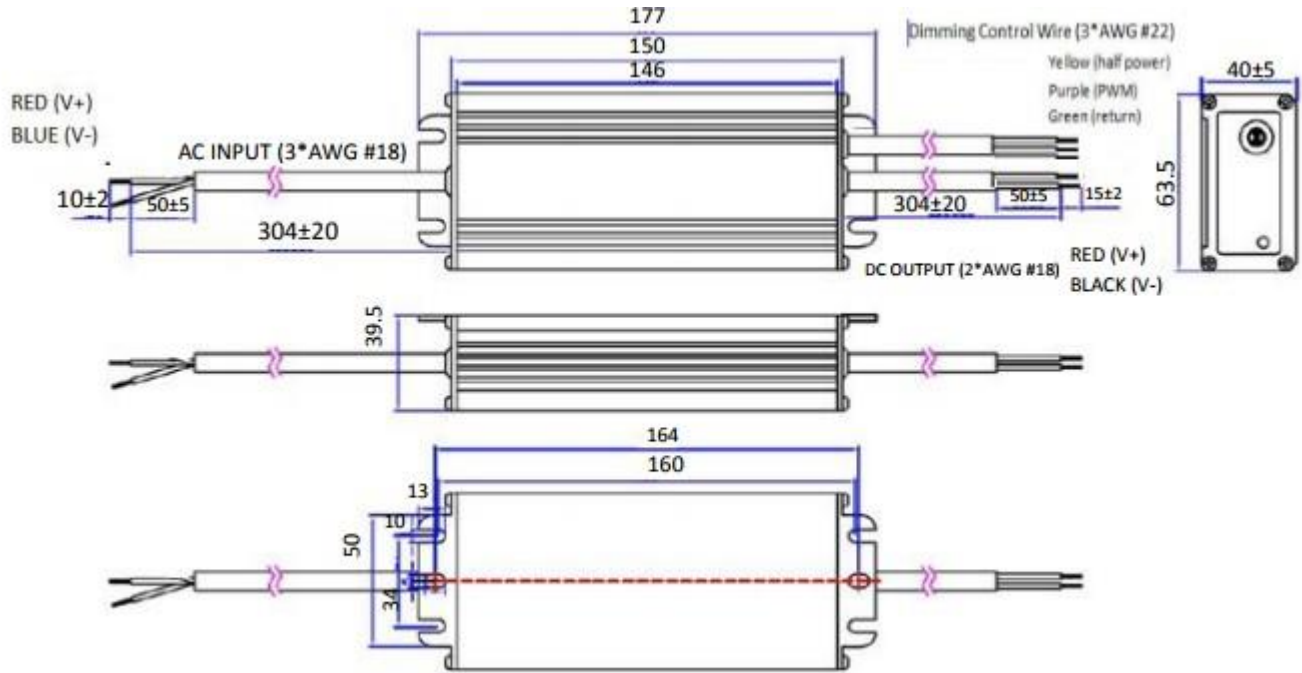

■ **Non-Dimming Mechanical Diagram**

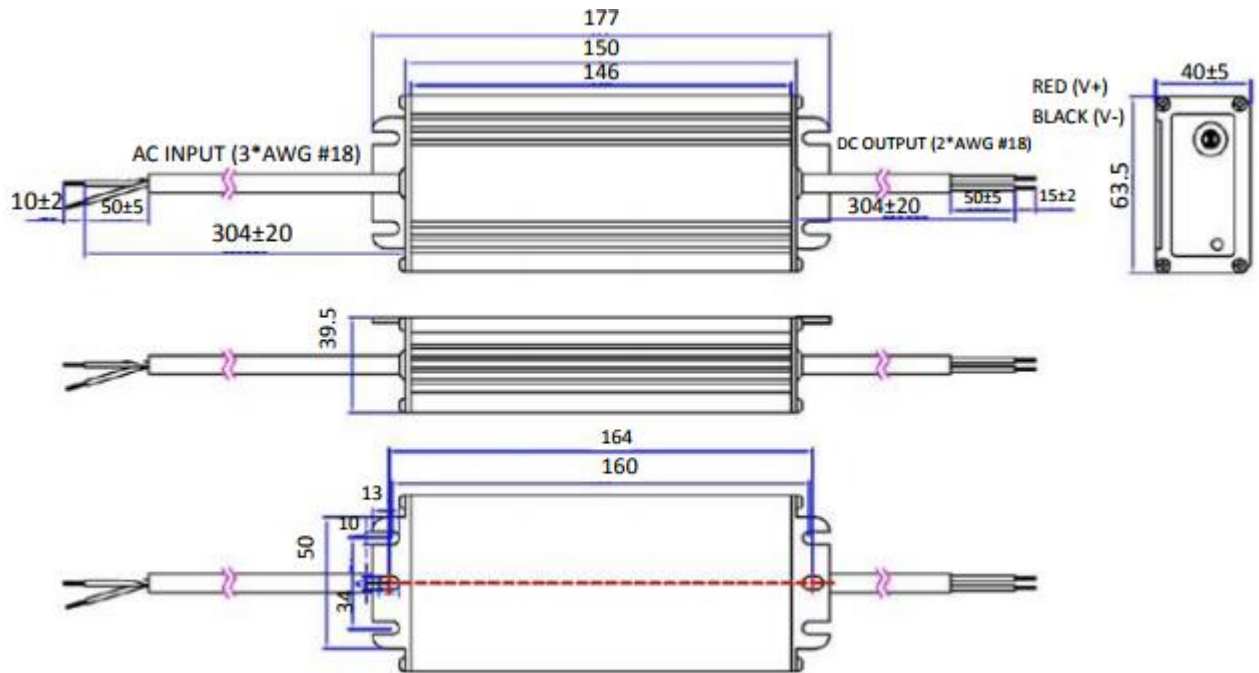

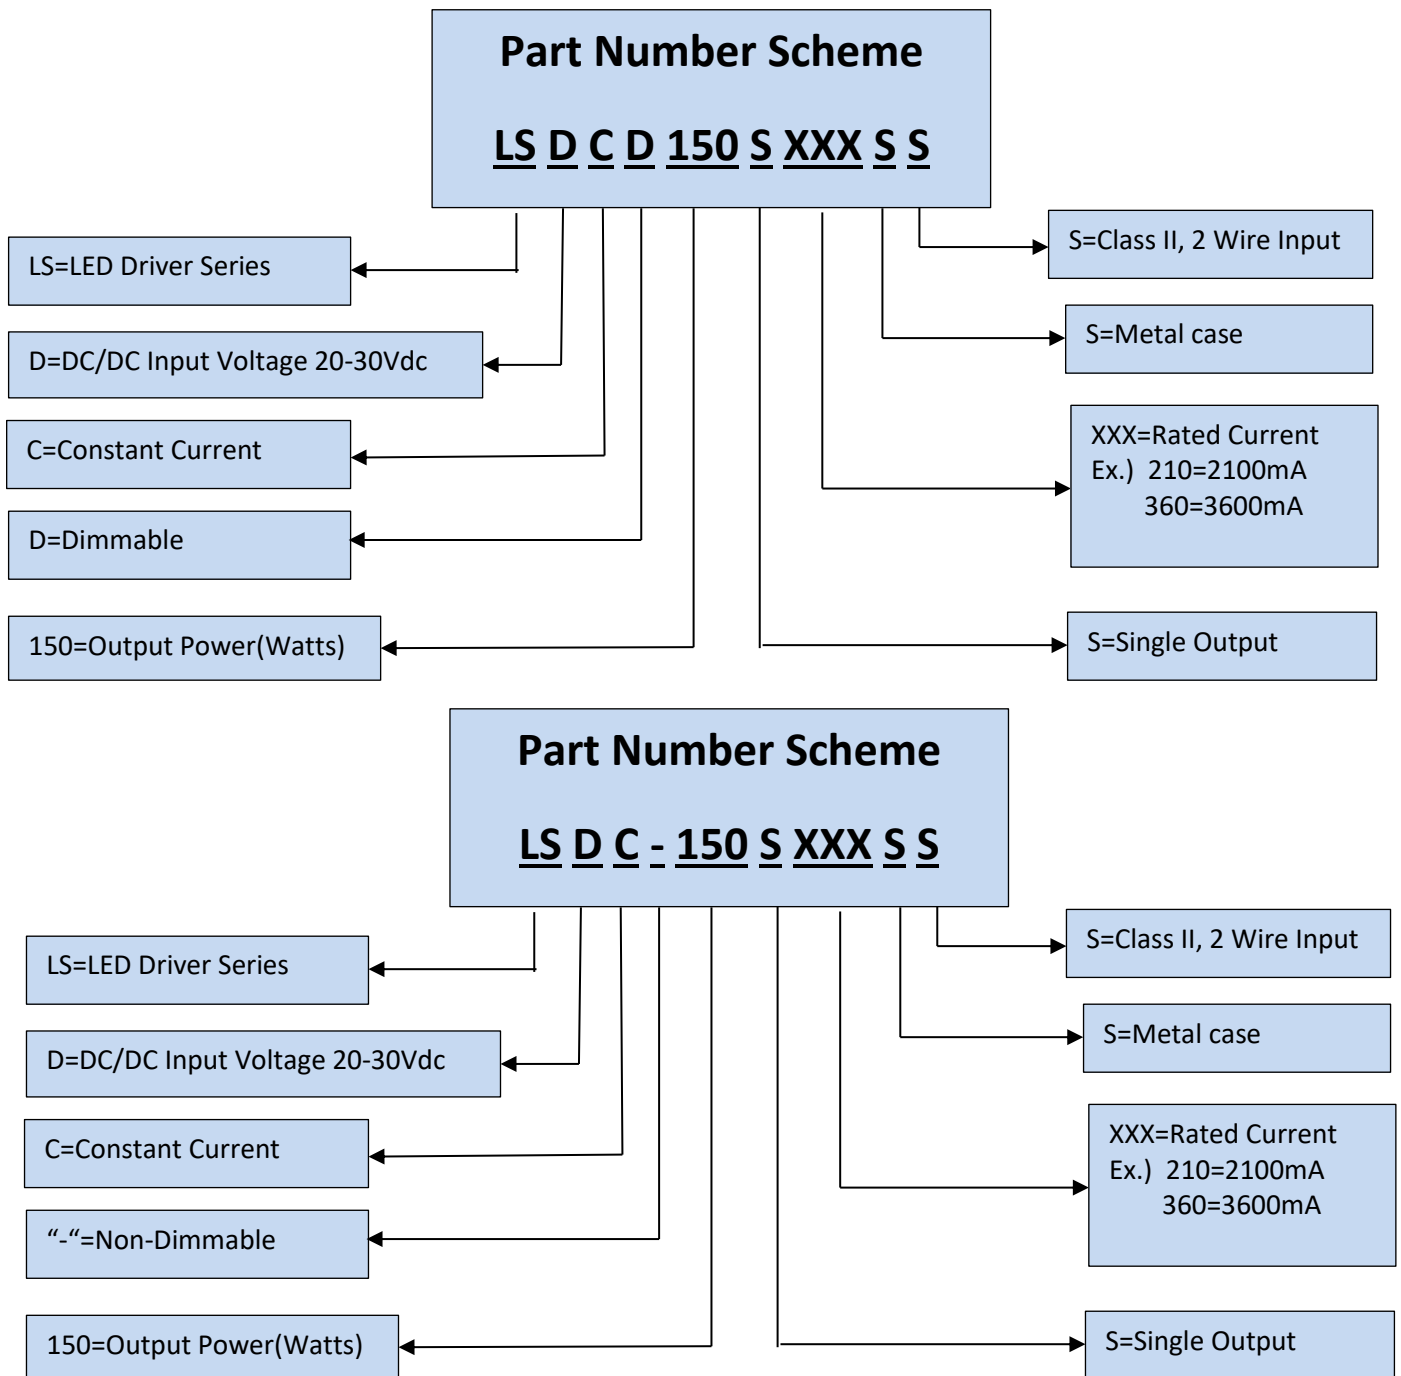

**\*Product images are for illustrative purposes only and may vary from actual design.**

**\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.**

**Technical Sales / Customer Service:** +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)  
31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)