

■ **Features**

- Power Rating: 36W
- Input Voltage: 120Vac
- Constant current design
- Output currents (1000mA-1200mA)
- Fixed output current
- Efficiency up to 83%
- Dimmable with Triac trailing edge dimming option
- UL Class 2 Output
- OVP, SCP, & Open Circuit Protection
- IP20
- 5-year warranty



*Product images are for illustrative purposes only and may vary from actual design.

■ **Application**

- Indoor and outdoor lights
- Damp locations


■ **Model List***(See part number scheme for model number details)

Model Number	Input Voltage Range	Output Power	Output Voltage	Output Current Min.	Output Current Max.	Efficiency	Certification
LXLCT036S100SS-20	120Vac ± 10%	36W	12-36V	1000mA	1000mA	82%@120V	UL
LXLCT036S110SS-20	120Vac ± 10%	36W	11-33V	1100mA	1100mA	82%@120V	UL
LXLCT036S120SS-20	120Vac ± 10%	36W	10-30V	1200mA	12000mA	83%@120V	UL

■ **Wiring Diagram**



■ Wiring Diagram (cont.)

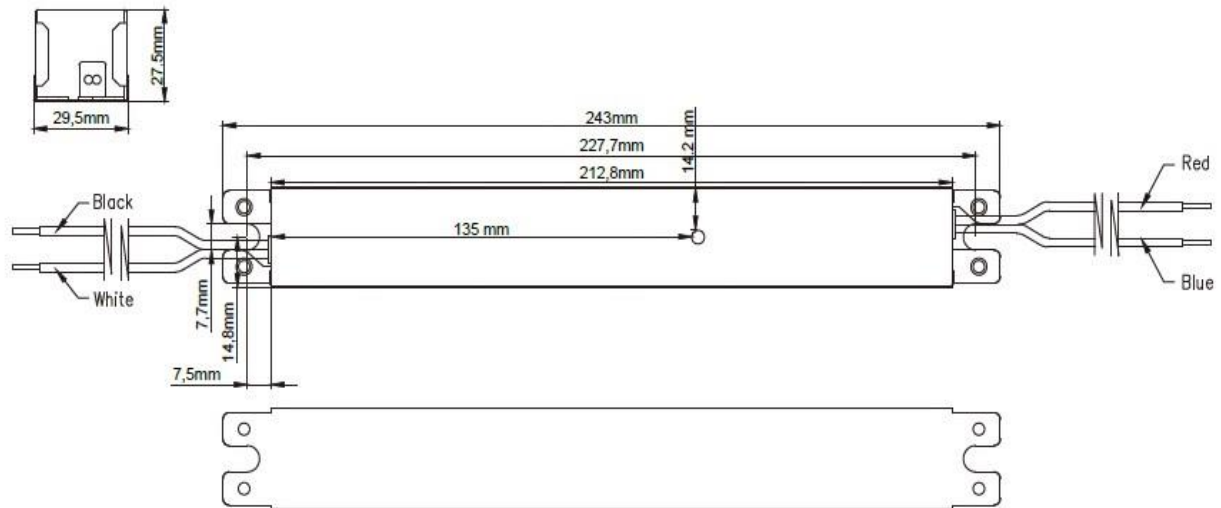

Input Wire: 12" UL 1316 #18AWG (Black and White)
 Output Wire: 12" UL 1316 #22AWG (Red and Blue)

■ Technical Data

Input voltage range	120Vac ± 10%
Frequency	60Hz
Power factor	> 0.9 under 120Vac input with 80~100% load condition (for all output currents)
Inrush current	20A @120V
Max input current	0.40A @120V
THD	< 20% under 120Vac input with 80~100% load condition (for all output currents)
Load Regulation	± 2%
Line Regulation	± 1%
Current Tolerance	± 5% at full load condition
Turn-on Delay Time	< 0.75s at full load condition
Overshoot	< 10% at full load condition
No Load Power Consumption	< 1W
Ripple & Noise (pk-pk)	< 10%
Withstand voltage	Input to output, 2,800Vdc, 2mA
Leakage current	Maximum 0.5mA



■ **Technical Data(cont.)**

Protection	Over voltage protection: Hiccup mode. Protection will trigger when load voltage exceeds specified output voltage and will auto recover after the fault mode is removed. Over current protection: Hiccup mode. Protection will trigger when load current exceeds specified output current and will auto recover after the fault mode is removed. Short circuit protection: Hiccup mode. Protection will trigger when short circuit and will auto recover after the fault mode is removed.
Operating Temperature	-40° to 60°C
Storage Temperature	-40° to 85°C
Humidity	5% to 95%
MTBF	440,000 Hours
Life rating	76,000 hours at 120Vac input, 100% load and 60°C case temperature
Maximum case Temperature	90°C
Length (L)	9.57" (243mm)
Width (W)	1.13" (29.5mm)
Height (H)	1.07" (27.5mm)
Mounting (M)	8.95" (227.7mm)
Weight	0.4kg
Packing	0.40kg; 50pcs/carton; 1,750/pallet


■ **Safety Compliance**

UL/cUL	UL 8750
CE	EN61347-1, EN61347-2-13
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (Consumer Limit)
EN61000-3-2	Harmonic Current Emissions Class C


■ **Lifetime/Case Temp**

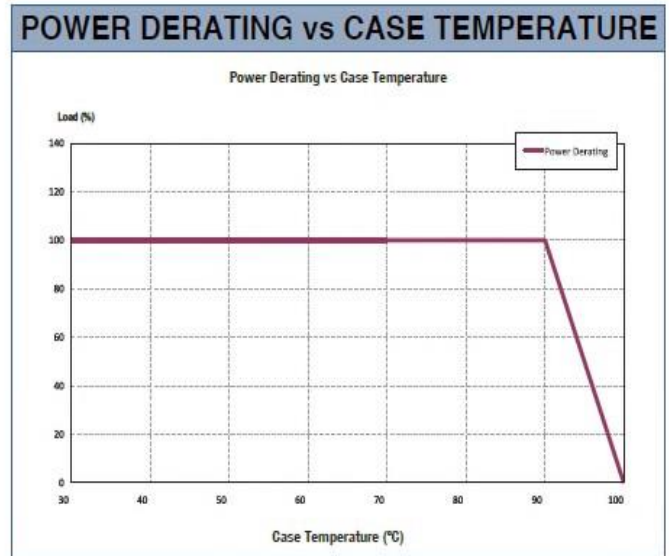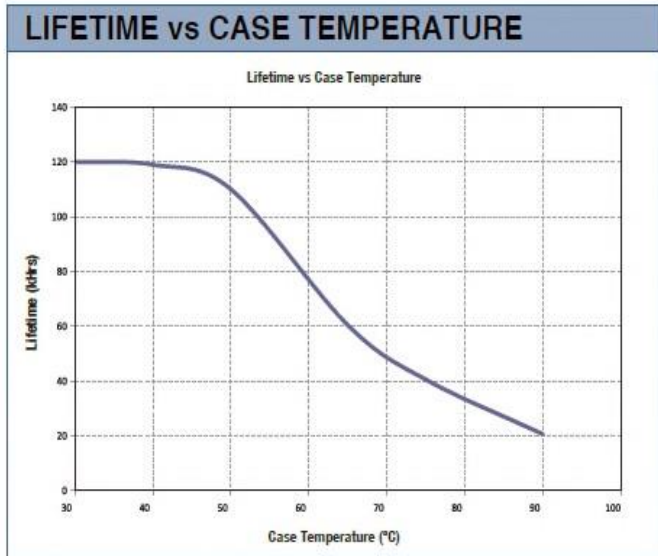

■ **Power Factor vs Load**

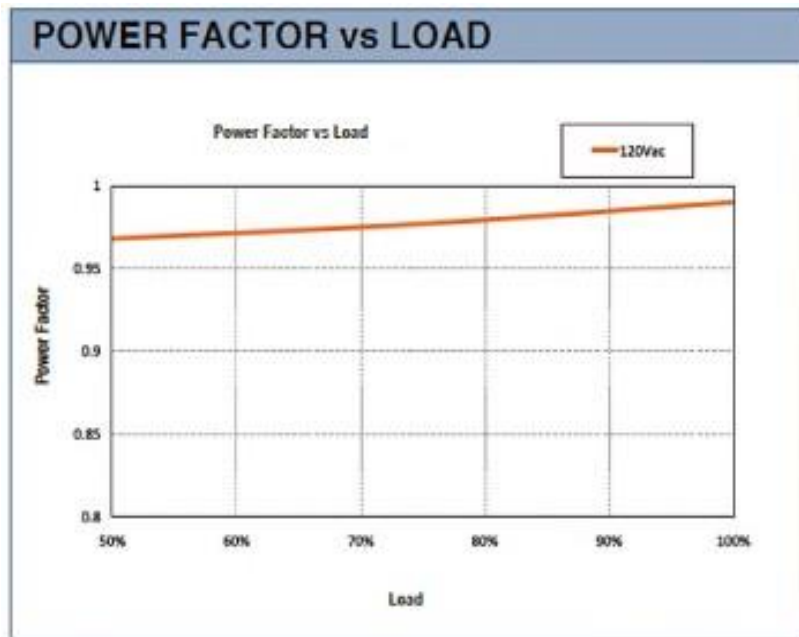


■ Efficiency vs Load

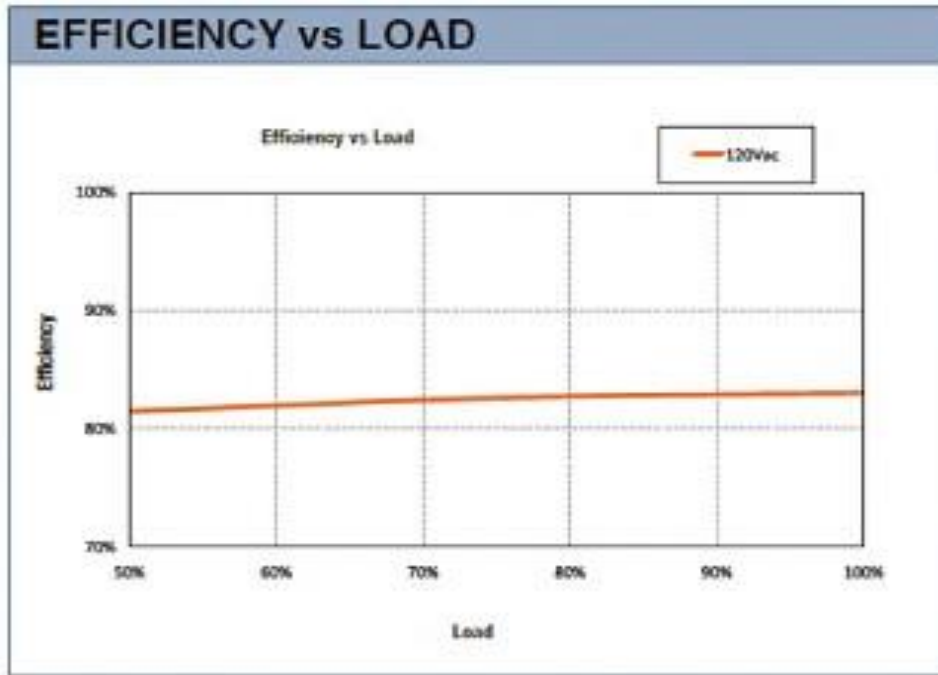

Part Number Scheme

LX L C T 036 S XXX S S -20

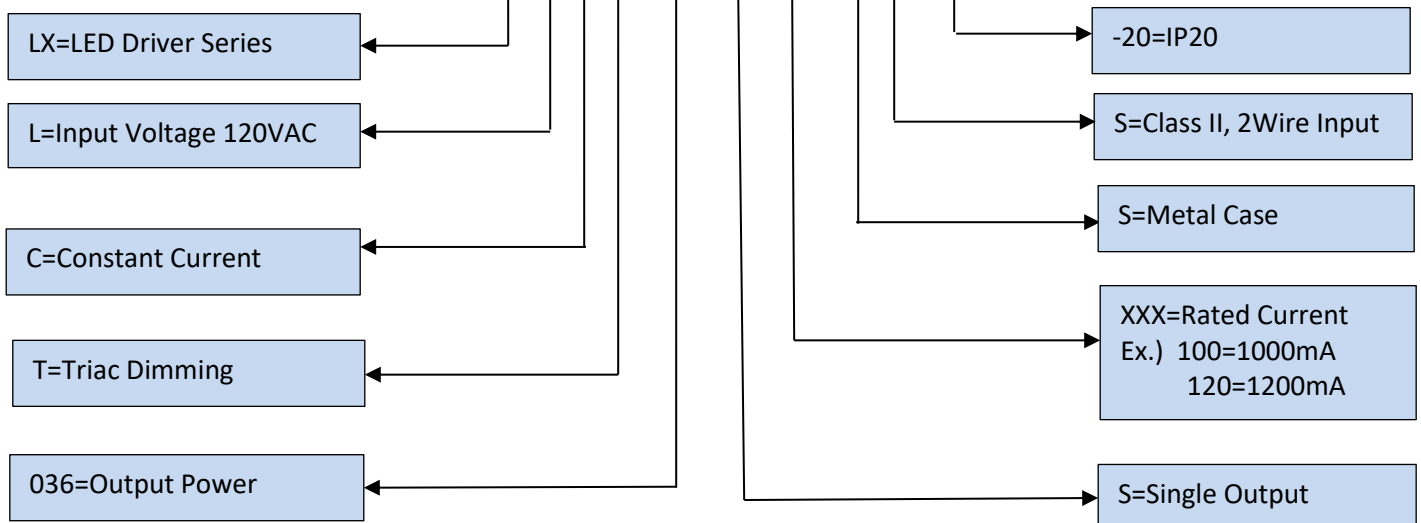

*Product images are for illustrative purposes only and may vary from actual design.

*Specifications are subject to change without notice. Autec is not Responsible for issues arising from errors or omissions.

Technical Sales / Customer Service: +1-818-338-7788 • Email: sales@autec.com
31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • www.autec.com